

The Road Inventory of Middle Mississippi National Wildlife Refuge Rockwood, IL



Prepared By:
Federal Highway Administration
Central Federal Lands Highway Division
December 2009



TABLE OF CONTENTS

<u>SECTION</u>		<u>PAGE</u>
I.	<u>INTRODUCTION</u>	1 - 1
II.	<u>SUMMARY INFORMATION</u> Summaries by Condition, Surface Type and Functional Class	2 - 1
III.	<u>REFUGE ROUTE LOCATION MAPS</u>	3 - 1
IV.	<u>ROUTE IDENTIFICATION LIST</u>	4 - 1
V.	<u>ROUTE CONDITION RATING SHEETS</u>	5 - 1
VI.	<u>PARKING LOT CONDITION RATING SHEETS</u>	6 - 1
VII.	<u>BRIDGE INVENTORY INFORMATION</u>	7 - 1
VIII.	<u>PHOTOGRAPHIC SHEETS</u>	8 - 1
IX.	<u>ACCIDENT SUMMARY</u>	9 - 1
	<u>APPENDIX</u>	
	Functional Classification Table	i
	Description of Rating System	ii

INTRODUCTION

The Transportation Equity Act for the 21st Century (Public Law 105-178) created the Refuge Roads Program. Refuge roads are those public roads that provide access to or within a unit of the National Wildlife Refuge System and for which title and maintenance responsibility is vested in the United States Government. Funds from the Highway Trust Fund are available for refuge roads and can be used by the station to pay the cost of:

- (a) Maintenance and improvements of refuge roads.
- (b) Maintenance and improvements of:
 - (1) Adjacent vehicle parking areas
 - (2) Provision for pedestrians and bicycles and
 - (3) Construction and reconstruction of roadside rest areas that are located in or adjacent to wildlife refuges
- (c) Administrative costs associated with such maintenance and improvements.

The funds available for refuge roads are to be disbursed based on the relative needs of the various refuges in the National Wildlife Refuge System, and taking into consideration:

- (a) The comprehensive conservation plan for each refuge;
- (b) The need for access as identified through land use planning; and
- (c) The impact of land use planning on existing transportation facilities.

To determine the relative needs of the U.S. Fish and Wildlife Service, the Federal Highway Administration (FHWA) was asked to inventory all public access roads and parking lots and provide a condition assessment of each. In 2008 the inventory was expanded to include administrative (service use only) roads and parking lots. An FHWA representative meets with refuge personnel to identify route segments and assign route numbers and functional classifications (See Appendix) for each route. All roads and parking lots are mapped using Trimble GPS units and visually assessed for condition using the RSL method of evaluation developed at Utah State University (See Appendix). Culverts, Gates, Guardrails and Low Water Crossings are also mapped and inspected for any obvious defects.

An estimate is provided, in year 2008 dollars, based on the condition determined by the rating system. Estimates are based upon data and location factors from the 2008 RS Means Heavy Construction Cost Data 22nd Annual Edition. Cost estimates should be evaluated on a case-by-case basis when being used for programming purposes.

Native Surfaced roads and parking lots already inventoried will not be re-inventoried and will not appear individually in report chapters 5, 6 and 8. Mileages and areas of native surfaced roads and parking lots will still appear in all summaries in the report and will remain in the road inventory database. In addition to this report, the FHWA will furnish the condition ratings of each route and segment to the Fish and Wildlife Service in a Microsoft Access database so the data can be included in their Real Property Inventory.

Middle Mississippi River

Summaries

Route Miles and Percentages by Functional Class and Condition

Condition Rating (Based on RSL)*

F.C.	Excellent		Good		Fair		Poor		Failed		Total
	Miles	%	Miles	%	Miles	%	Miles	%	Miles	%	Miles
I	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
II	0.00	0.0%	0.00	0.0%	0.16	100.0%	0.00	0.0%	0.00	0.0%	0.16
III	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
IV	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
V	0.00	0.0%	1.90	47.3%	2.12	52.7%	0.00	0.0%	0.00	0.0%	4.03
Total	0.00	0.0%	1.90	45.4%	2.29	54.6%	0.00	0.0%	0.00	0.0%	4.19

*For a description of condition ratings for the various surface types see the Appendix.

Route Miles and Percentages by Surface Type and Condition

Paved Condition Rating [Condition(RSL)]

Surface Type	Excellent		Good		Fair		Poor		Failed		Total
	Miles	%	Miles	%	Miles	%	Miles	%	Miles	%	Miles
AS	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
CO	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00
Total	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.00

Unpaved Condition Rating [Condition(RSL)]

Surface Type	Excellent		Good		Fair		Poor		Failed		Total
	Miles	%	Miles	%	Miles	%	Miles	%	Miles	%	Miles
GR	0.00	0.0%	0.14	100.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	0.14
NA	0.00	0.0%	0.00	0.0%	2.29	100.0%	0.00	0.0%	0.00	0.0%	2.29
PR	0.00	0.0%	1.77	100.0%	0.00	0.0%	0.00	0.0%	0.00	0.0%	1.77
Total	0.00	0.0%	1.90	45.4%	2.29	54.6%	0.00	0.0%	0.00	0.0%	4.19

Square Footage (Parking Areas)

Condition Rating

Surface Type	Excellent		Good		Fair		Poor		Failed		Total
	Sq Ft	%	Sq Ft	%	Sq Ft	%	Sq Ft	%	Sq Ft	%	Sq Ft
AS	0	0.0%	1,252	100.0%	0	0.0%	0	0.0%	0	0.0%	1,252
CO	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0
GR	0	0.0%	3,809	43.1%	5,022	56.9%	0	0.0%	0	0.0%	8,831
NA	0	0.0%	0	0.0%	19,812	100.0%	0	0.0%	0	0.0%	19,812
PR	0	0.0%	0	0.0%	0	0.0%	23,003	100.0%	0	0.0%	23,003
Total	0	0.0%	5,061	10.0%	24,834	47.0%	23,003	43.0%	0	0.0%	52,898

Middle Mississippi River Summaries


Route Miles and Percentages by Use Type and Condition
Road Condition Rating: Public/Administrative Use

Use Type	Excellent		Good		Fair		Poor		Failed		Total
	Miles	%	Miles	%	Miles	%	Miles	%	Miles	%	Miles
Admin	0.00	0.0%	1.90	47.3%	2.12	52.7%	0.00	0.0%	0.00	0.0%	4.03
Public	0.00	0.0%	0.00	0.0%	0.16	100.0%	0.00	0.0%	0.00	0.0%	0.16
Total	0.00	0.0%	1.90	45.4%	2.29	54.6%	0.00	0.0%	0.00	0.0%	4.19

Parking Condition Rating: Public/Administrative Use


Use Type	Excellent		Good		Fair		Poor		Failed		Total
	Sq Ft	%	Sq Ft	%	Sq Ft	%	Sq Ft	%	Sq Ft	%	Sq Ft
Admin	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0	0.0%	0
Public	0	0.0%	5,061	9.6%	24,834	46.9%	23,003	43.5%	0	0.0%	52,898
Total	0	0.0%	5,061	9.6%	24,834	46.9%	23,003	43.5%	0	0.0%	52,898

Middle Mississippi ROUTE LOCATION MAP

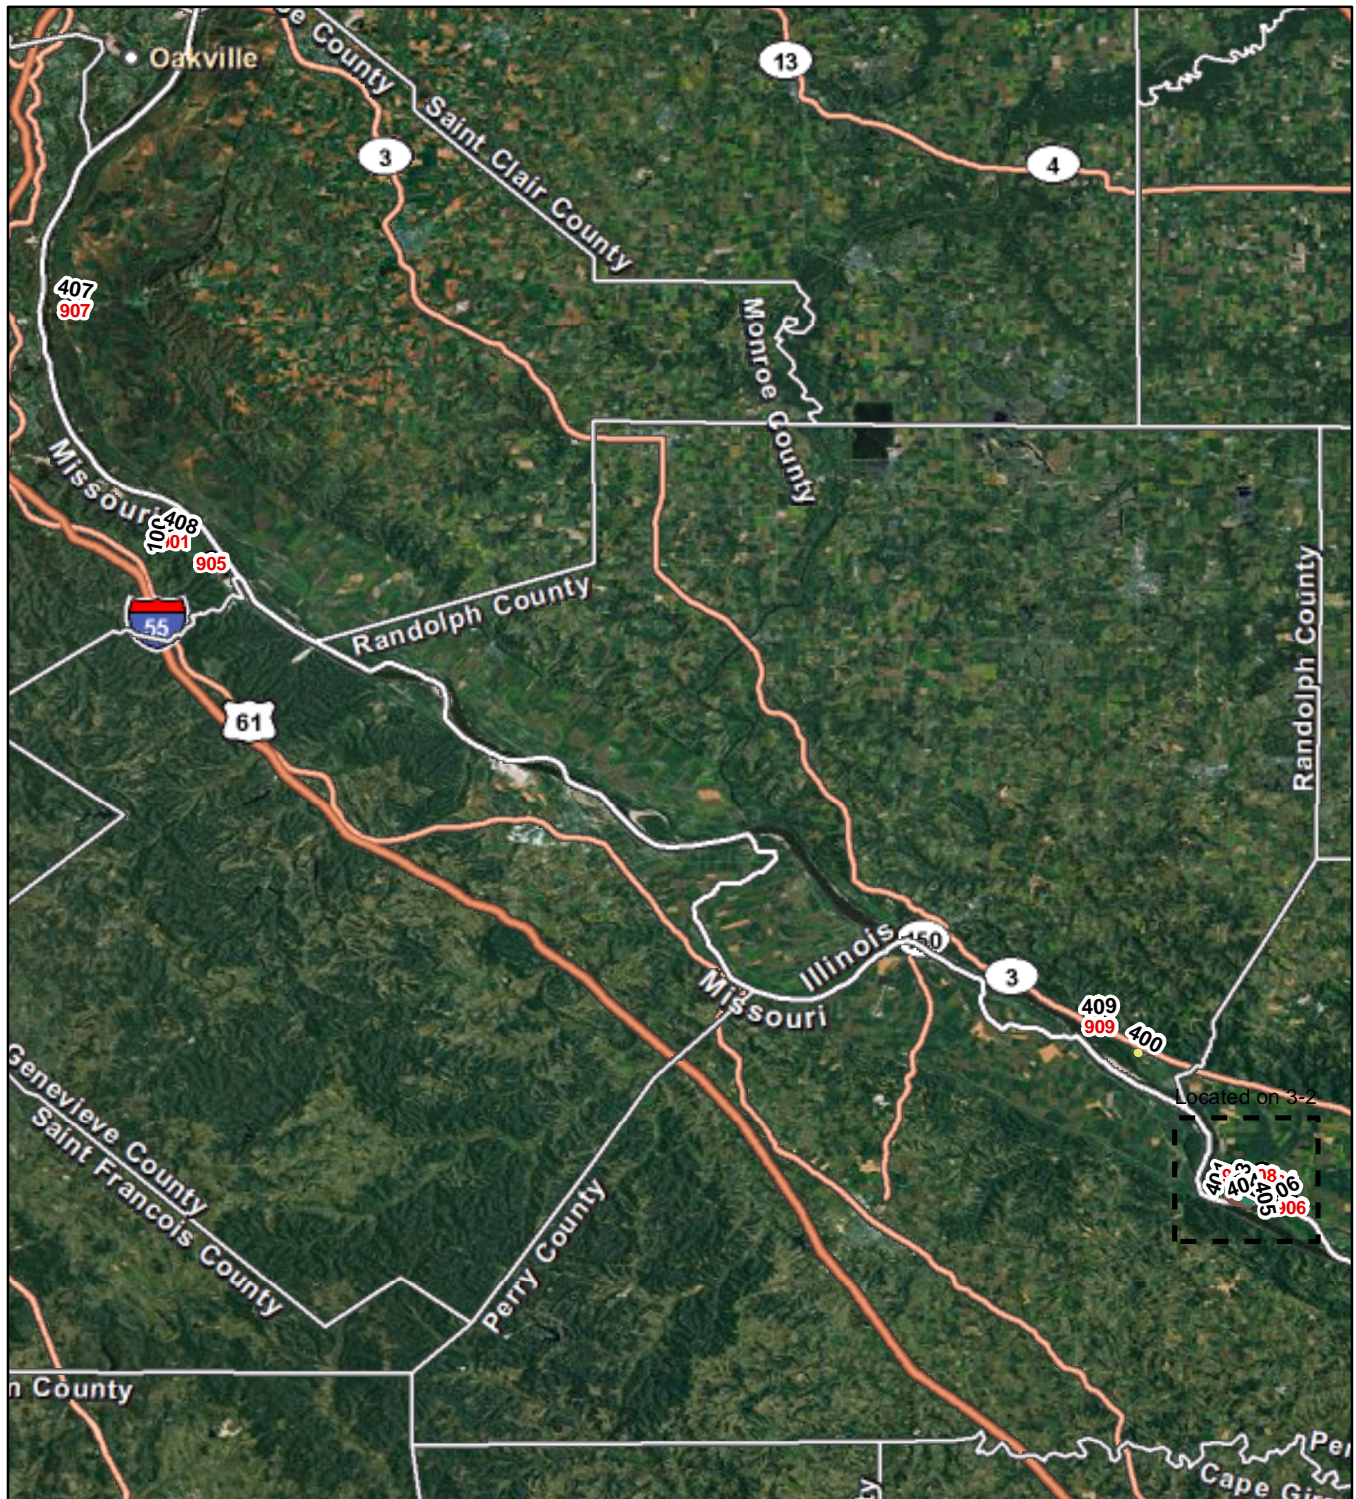

3

Middle Mississippi ROUTE LOCATION MAP

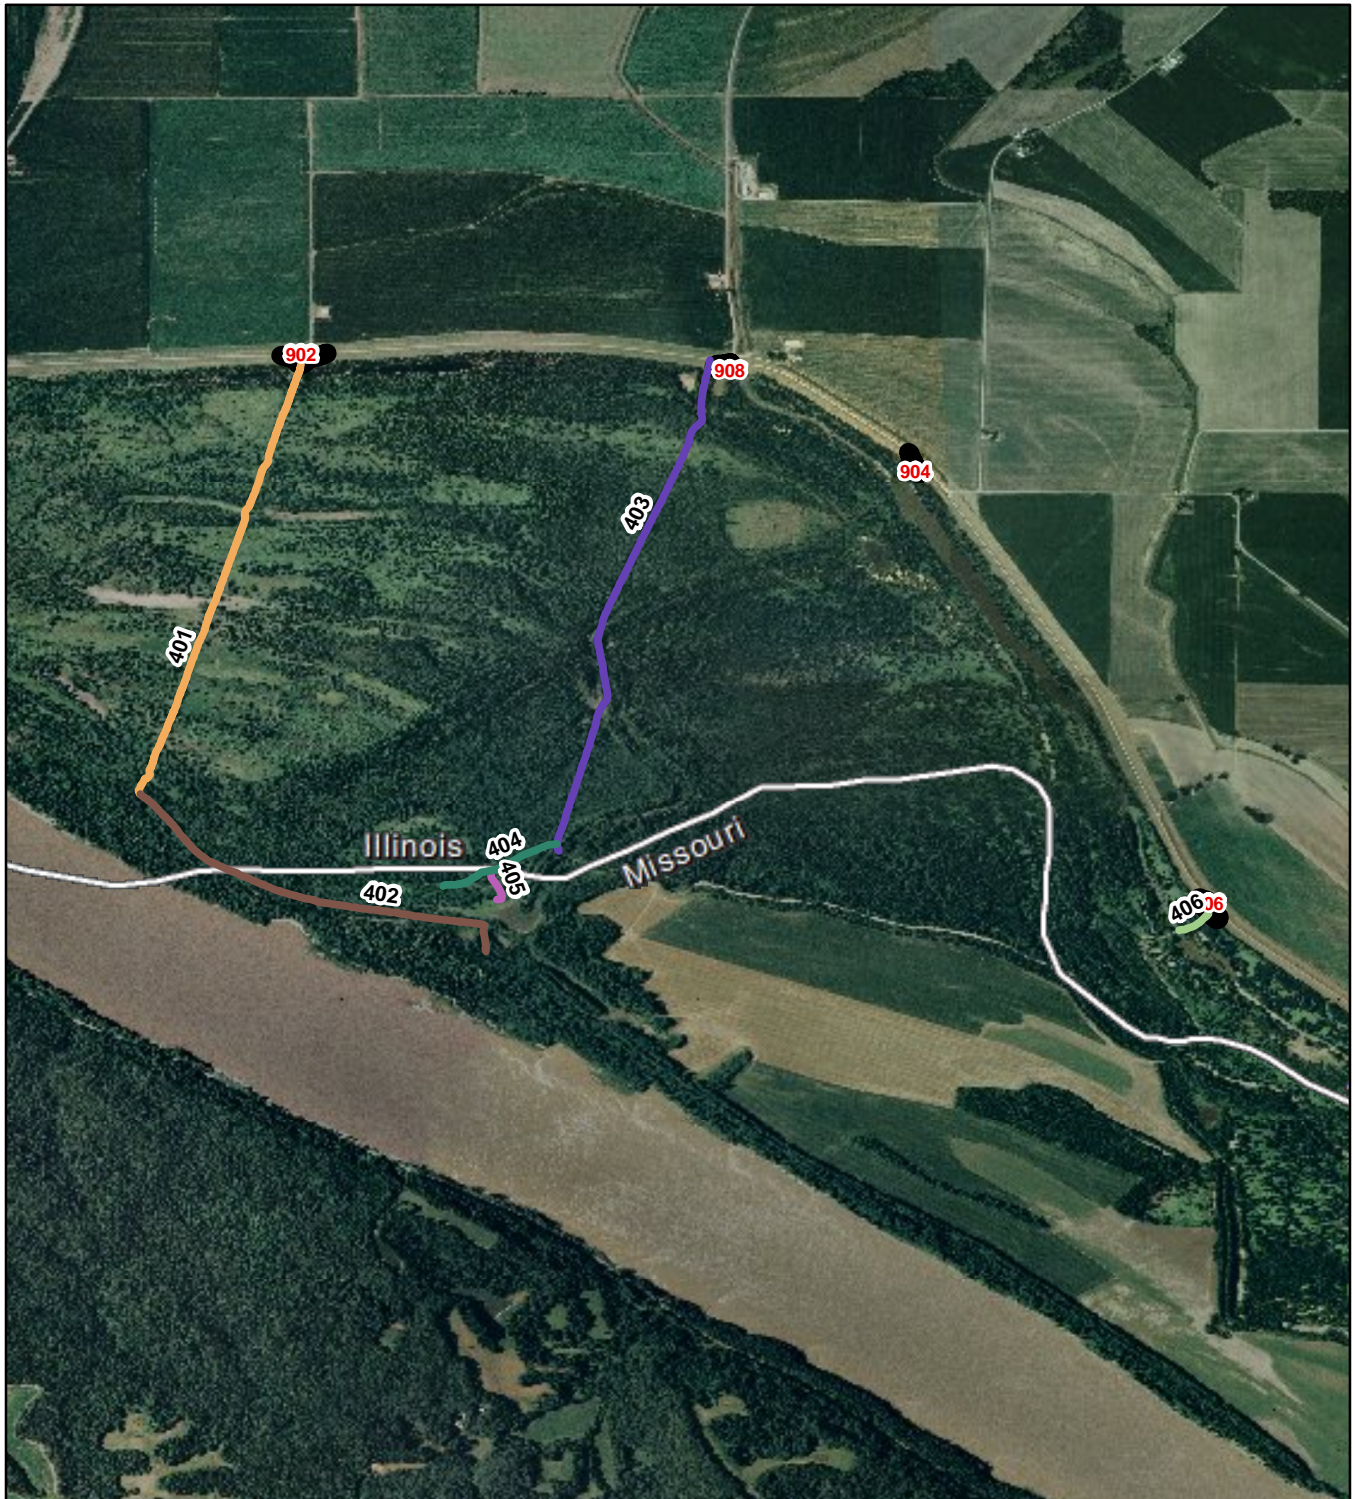

3

Middle Mississippi River - 33660 - ROUTE IDENTIFICATION LIST (NUMERIC)

Shading Color Key:

White = Paved Routes

Yellow = Unpaved Routes

RTE #	Asset Number	ROUTE NAME	RTE MI	ROUTE DESCRIPTION	PAVED MI	UN-PAVED MI	LANES	FC
100	10043505	Middle Harlow Island Access Road	0.16	From rail road crossing off State Road AA to Middle Harlow Island Service Road (Route 408)	0.00	0.16	1	2
400	10061186	Rockwood Island Service Road	0.05	From county road to end of distinguishable route	0.00	0.05	1	5
401	10061160	Wilkinson Island North Road	1.12	From North Wilkenson Island Access Parking (Route 902) to Wilkinson Island Dike Road (Route 402)	0.00	1.12	1	5
402	10061162	Wilkinson Island Dike Road	0.85	From Wilkinson Island North Road (Route 401) to end of distinguishable route	0.00	0.85	1	5
403	10043500	Wilkinson Island Center Access Road	1.27	From Levee Road to gate to private land	0.00	1.27	1	5
404	10061152	Middle Wilkinson Island Access Connector Road	0.25	From Wilkenson Island Center Access Road (Route 403) to end of route at problem area	0.00	0.25	1	5
405	10061157	Middle Wilkinson Island Access Spur Road	0.08	From Middle Wilkenson Island Access Connector Road (Route 404) to end of distinguishable route	0.00	0.08	1	5
406	10061162	Wilkinson Island Southern Access Road	0.07	From Wilkenson Island Southern Parking (Route 906) to end of route at locked gate	0.00	0.07	1	5
407	10061184	Meissner Island Service Road	0.24	From Meissner Island Parking (Route 907) to end of route at problem area	0.00	0.24	1	5
408	10061180	Middle Harlow Island Service Road	0.02	From Middle Harlow Island Access Road (Route 100) to end of route at problem area	0.00	0.02	1	5
409	10055415	Shop Road	0.06	From Rocky Hollow Road to end of distinguishable route	0.00	0.06	1	5

Middle Mississippi River - 33660 - ROUTE IDENTIFICATION LIST (PARKING)

Shading Color Key:

White = Paved Parking Lots

Green = Unpaved Parking Lots

RTE #	Asset Number	ROUTE NAME	RTE SQFT	ROUTE DESCRIPTION	PAVED SQFT	UNPAVED SQFT
900	10043506	South Harlow Island/Truman Boat Ramp Access Parking	873		873.00	0
901	10043507	Middle Harlow Island Access Parking	5,890		0.00	5,890
902	10043501	North Wilkinson Island Access Parking	8,236		0.00	8,236
904	10043503	South Central Wilkinson Island Access Parking	5,235		0.00	5,235
905	10043506	South Harlow Island/Truman Boat Ramp Handicapped Access Parking	379		379.00	0
906	10061165	Southern Wilkinson Island Parking	17,113		0.00	17,113
907	10061183	Meissner Island Parking	6,341		0.00	6,341
908	10061163	Central Wilkinson Island Parking	3,235		0.00	3,235
909	10055415	Shop Parking	1,787		0.00	1,787
910	10055417	Headquarters Parking	3,809		0.00	3,809

CHANGES TO THE FISH AND WILDLIFE SERVICE ROAD INVENTORY REPORT

Middle Mississippi River




Routes added to previous inventory*:		
Rte #	Rte Name	Reason for Addition
400	Rockwood Island Service Road	Administrative
401	Wilkinson Island North Road	Administrative
402	Wilkinson Island Dike Road	Administrative
403	Wilkenson Island Center Access Road	Administrative
404	Middle Wilkenson Island Access Connector Road	Administrative
405	Middle Wilkenson Island Access Spur Road	Administrative
406	Wilkenson Island Southern Access Road	Administrative
407	Meissner Island Service Road	Administrative
408	Middle Harlow Island Service Road	Administrative
409	Shop Road	Administrative
905	South Harlow Island/Truman Boat Ramp Handicap	New public parking
906	Wilkenson Island Southern Parking	New public parking
907	Meissner Island Parking	New public parking
908	Wilkenson Island Center Parking	New public parking
909	Shop Parking	New public parking
910	Headquarters Parking	New public parking

Routes removed from previous inventory:		
Rte #	Rte Name	Reason for Removal
010	Truman Access Road	Discovered to be county road, removed from inventory
903	Middle Wilkenson Island Access Parking	Closed/decommissioned

Routes modified from previous inventory:			
Rte #	Rte Name	Type of Modification	Description of Modification
100	Middle Harlow Island Access Road	Geometry change	
101	Middle Wilkenson Island Access Parking	Function class/Name change	
900	South Harlow Island/Truman Boat Ramp Access	Geometry change	
901	Middle Harlow Island Access Parking	Geometry change	
902	North Wilkenson Island Access Parking	Geometry change	
904	South Central Wilkenson Island Access Parking	Geometry change	

Comments:

Route 101 name changed to Wilkinson Island Center Access Road (Route 403)
Parking Lot 903 no longer exists

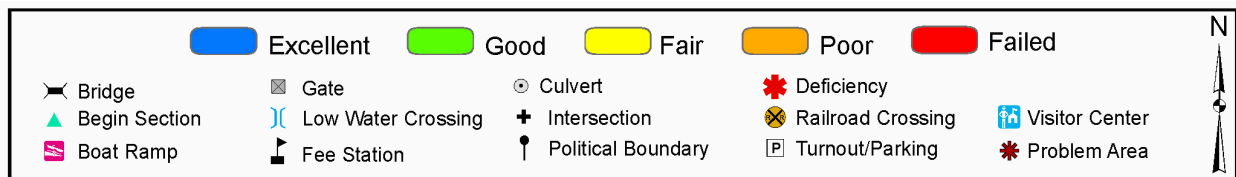
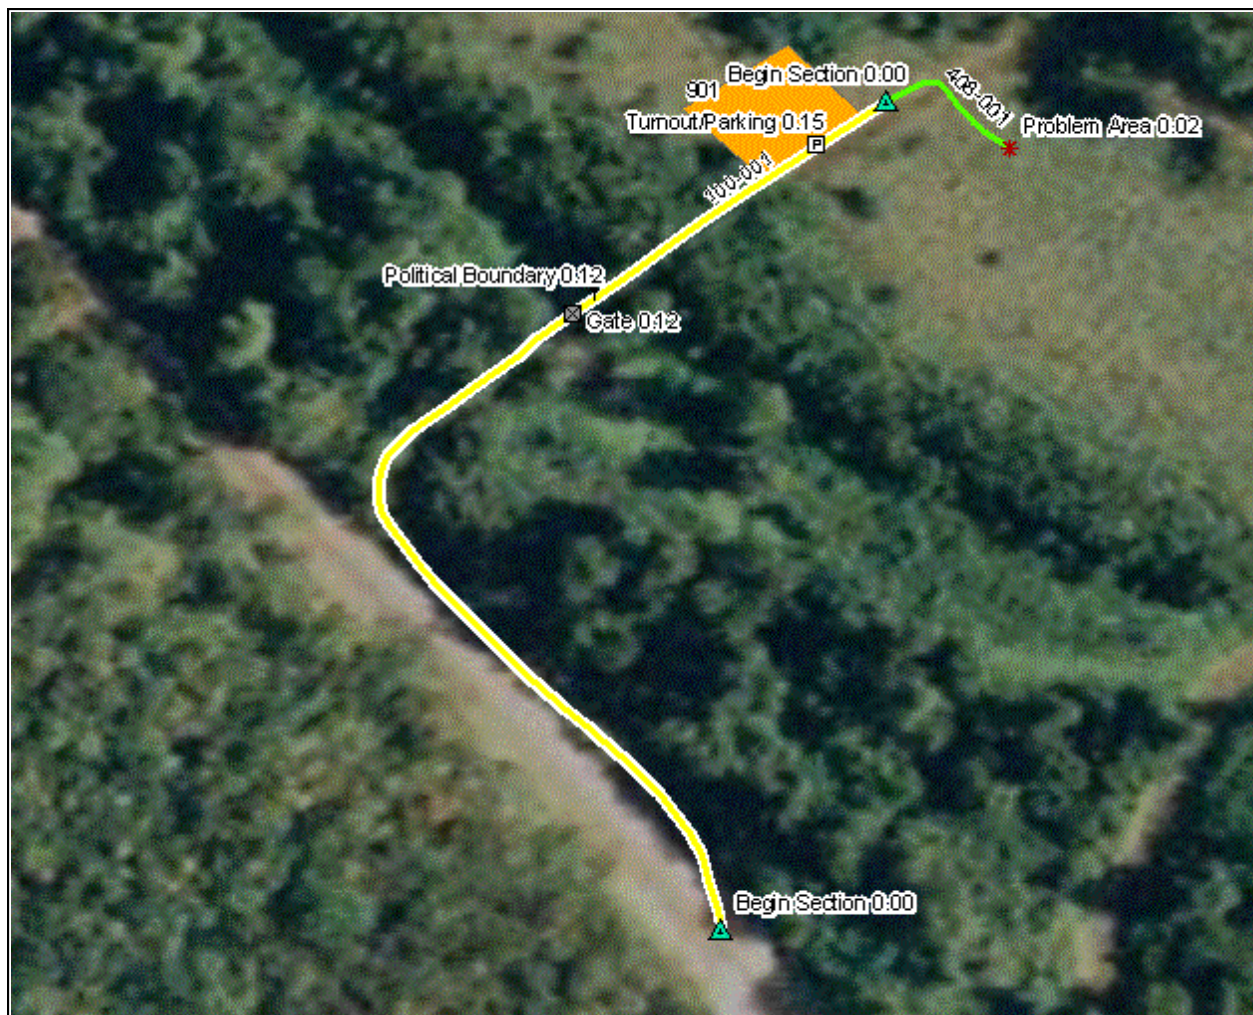


Route: 100 Middle Harlow Island Access Road

Total Route Length: **0.16 Miles**

Route Description: From rail road crossing off State Road AA to Middle Harlow Island Service Road (Route 408)

Asset Number	10043505
Section Number	001
Section Length (miles)	0.16
Inspection Date	10/01/2009
Section Information	
Surface Type	Native
Number of Lanes	1
Roadway Width (feet)	10.00
Roadway Condition Information	
Condition	Fair
Remaining Service Life (years)	3
Cost Estimate	400
CRV	59,800.00

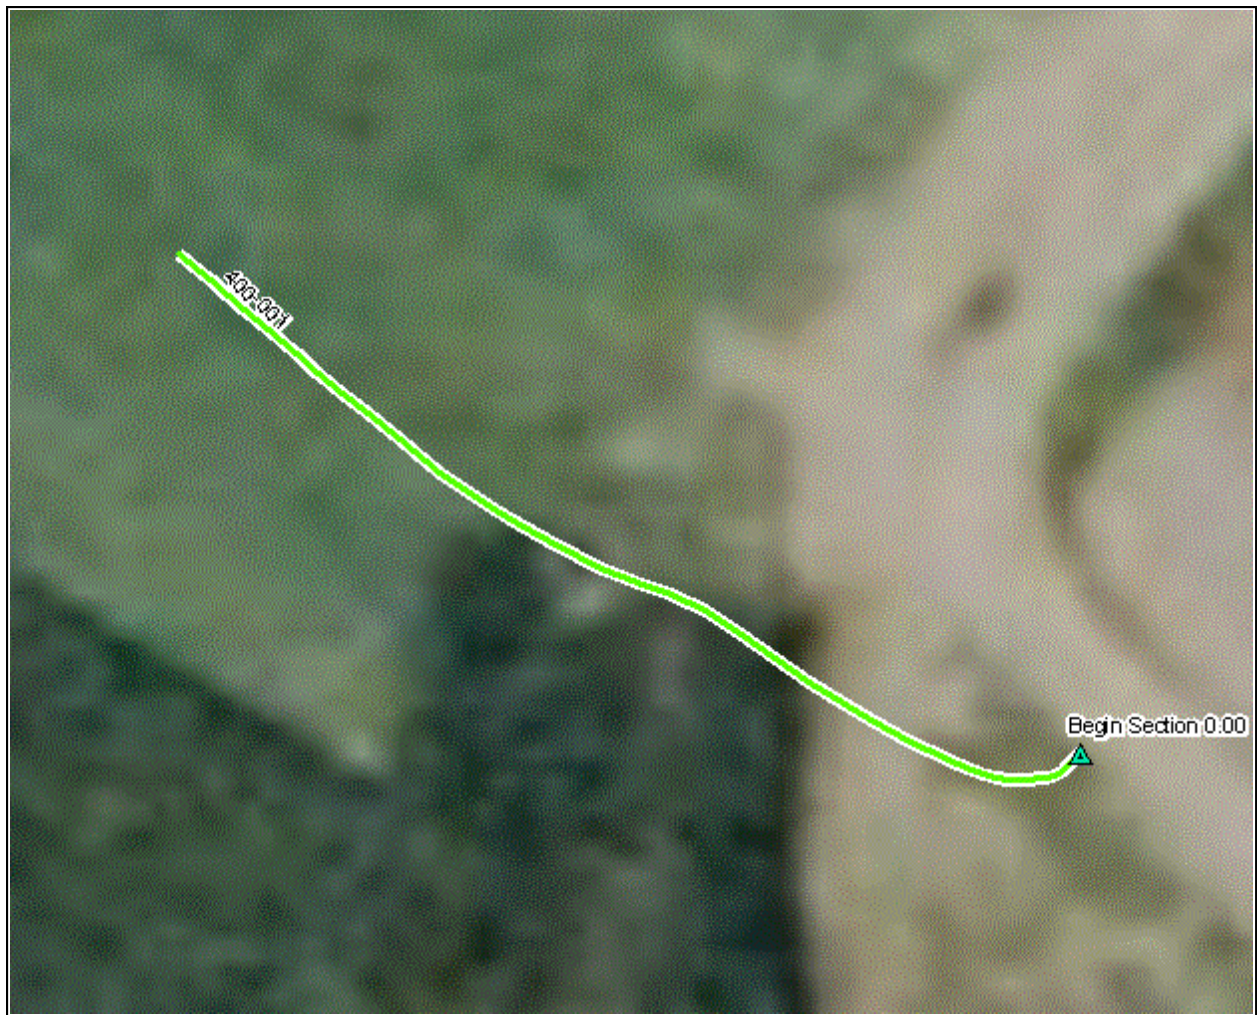


Route: 400 Rockwood Island Service Road

Total Route Length: **0.05 Miles**

Route Description: From county road to end of distinguishable route

Asset Number	10061186
Section Number	001
Section Length (miles)	0.05
Inspection Date	10/01/2009
Section Information	
Surface Type	Primitive
Number of Lanes	1
Roadway Width (feet)	8.00
Roadway Condition Information	
Condition	Good
Remaining Service Life (years)	5
Cost Estimate	0
CRV	0.00



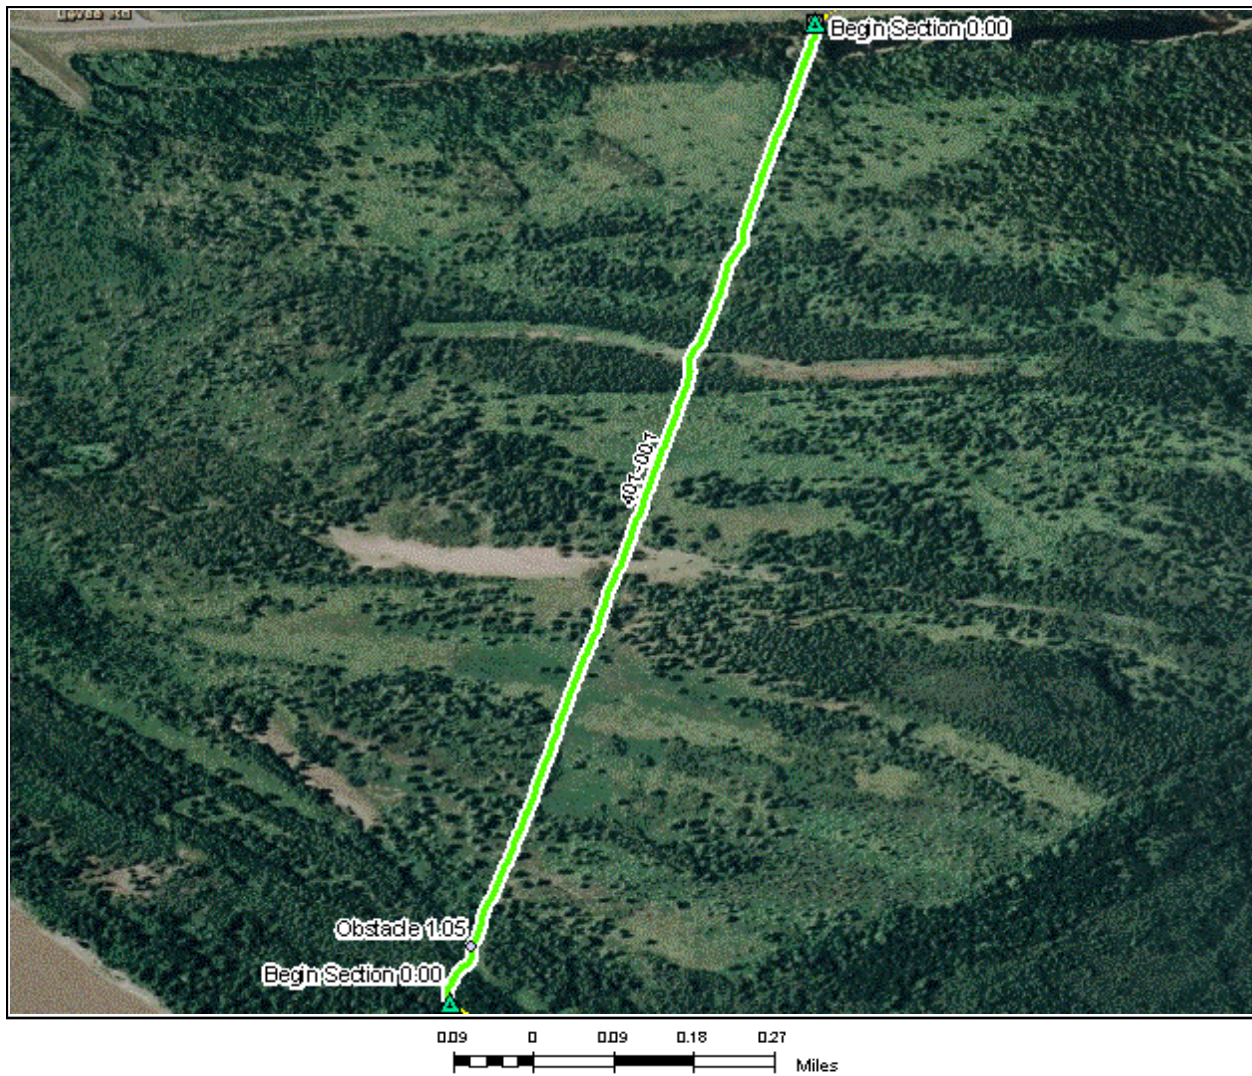


Route: 401 Wilkinson Island North Road

Total Route Length: **1.12 Miles**

Route Description: From North Wilkenston Island Access Parking (Route 902) to Wilkinson Island Dike Road (Route 402)

Asset Number	10061160
Section Number	001
Section Length (miles)	1.12
Inspection Date	10/01/2009
Section Information	
Surface Type	Primitive
Number of Lanes	1
Roadway Width (feet)	10.00
Roadway Condition Information	
Condition	Good
Remaining Service Life (years)	7
Cost Estimate	500
CRV	0.00

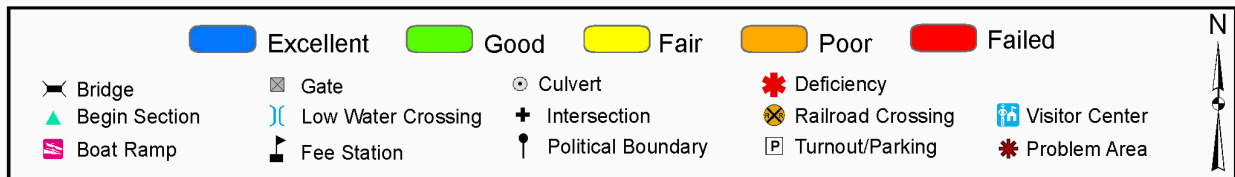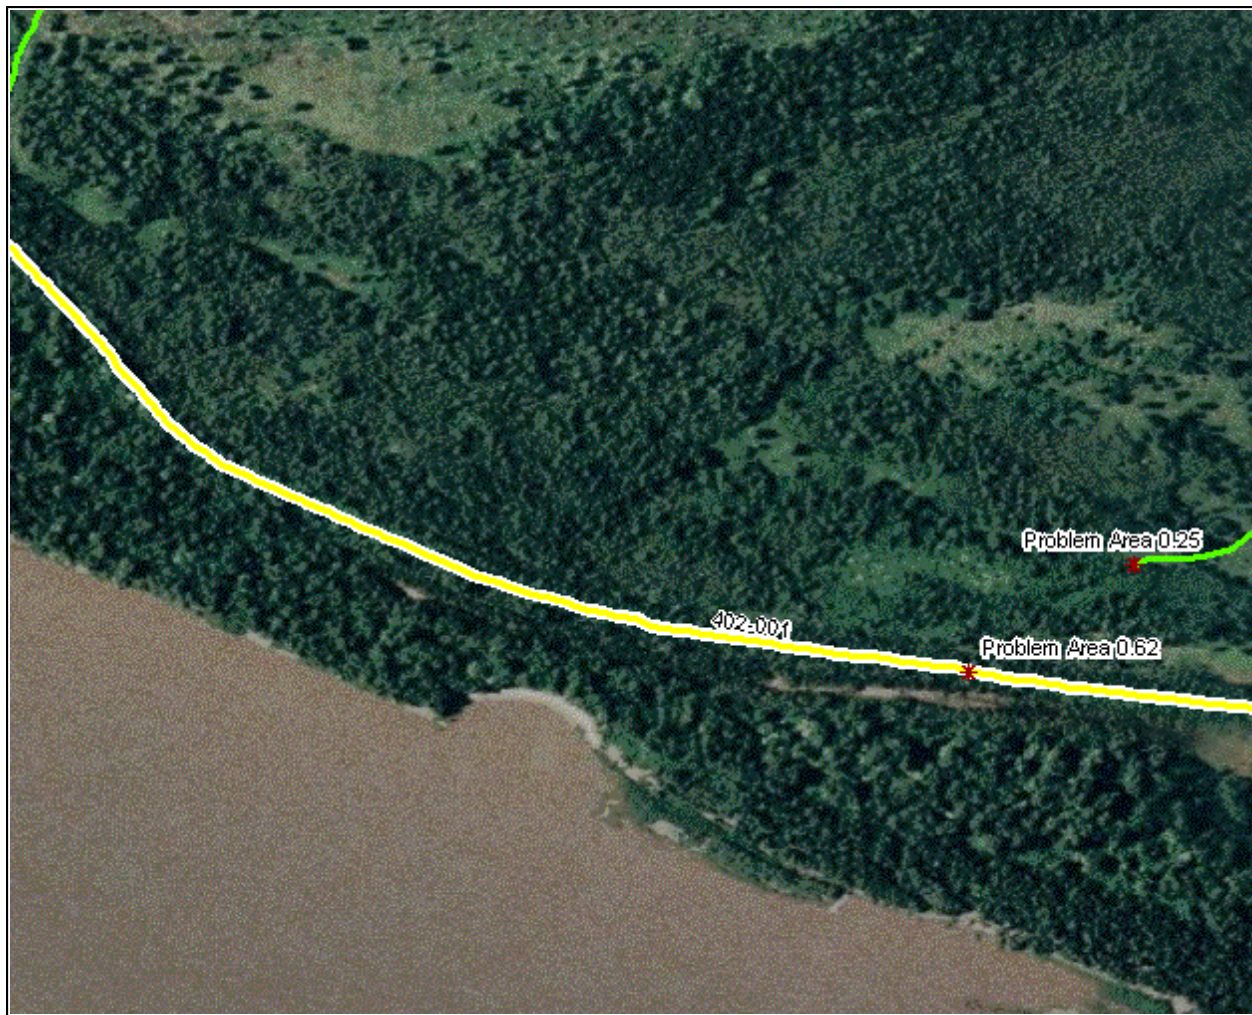


Route: 402 Wilkinson Island Dike Road

Total Route Length: **0.85 Miles**

Route Description: From Wilkinson Island North Road (Route 401) to end of distinguishable route

Asset Number	10061162
Section Number	001
Section Length (miles)	0.85
Inspection Date	10/01/2009
Section Information	
Surface Type	Native
Number of Lanes	1
Roadway Width (feet)	10.00
Roadway Condition Information	
Condition	Fair
Remaining Service Life (years)	4
Cost Estimate	1,900
CRV	309,900.00

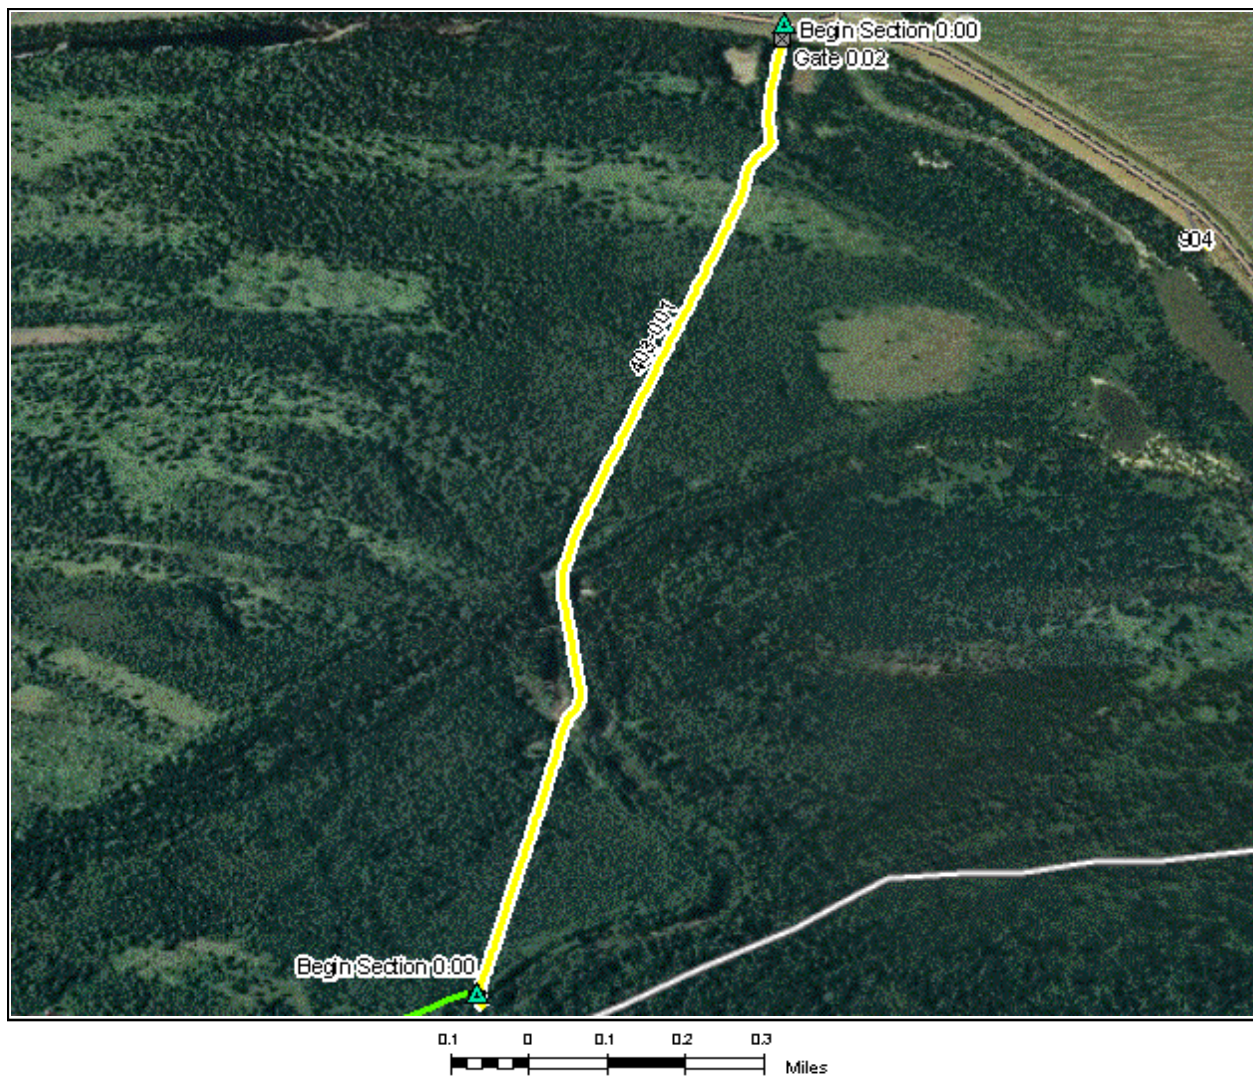

Route: 403 Wilkinson Island Center Access Road

Total Route Length: 1.27 Miles

Route Description: From Levee Road to gate to private land

Asset Number	10043500
Section Number	001
Section Length (miles)	1.27
Inspection Date	10/01/2009
Section Information	
Surface Type	Native
Number of Lanes	1
Roadway Width (feet)	10.00
Roadway Condition Information	
Condition	Fair
Remaining Service Life (years)	4
Cost Estimate	2,800
CRV	463,300.00




Route: 404 Middle Wilkinson Island Access Connector Road

Total Route Length: **0.25 Miles**

Route Description: From Wilkenson Island Center Access Road (Route 403) to end of route at problem area

Asset Number	10061152
Section Number	001
Section Length (miles)	0.25
Inspection Date	10/01/2009
Section Information	
Surface Type	Primitive
Number of Lanes	1
Roadway Width (feet)	10.00
Roadway Condition Information	
Condition	Good
Remaining Service Life (years)	5
Cost Estimate	100
CRV	0.00






Route: 405 Middle Wilkinson Island Access Spur Road

Total Route Length: **0.08 Miles**

Route Description: From Middle Wilkinson Island Access Connector Road (Route 404) to end of distinguishable route

Asset Number	10061157
Section Number	001
Section Length (miles)	0.08
Inspection Date	10/01/2009
Section Information	
Surface Type	Primitive
Number of Lanes	1
Roadway Width (feet)	10.00
Roadway Condition Information	
Condition	Good
Remaining Service Life (years)	7
Cost Estimate	0
CRV	0.00

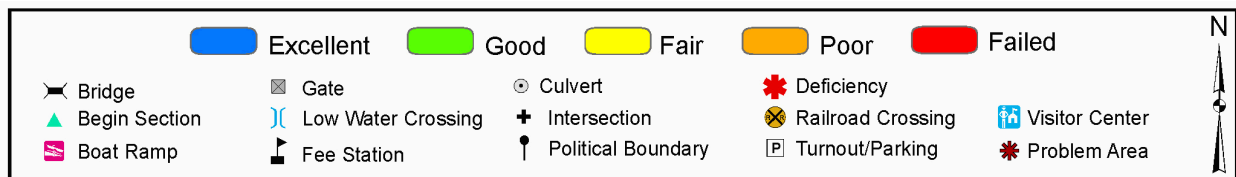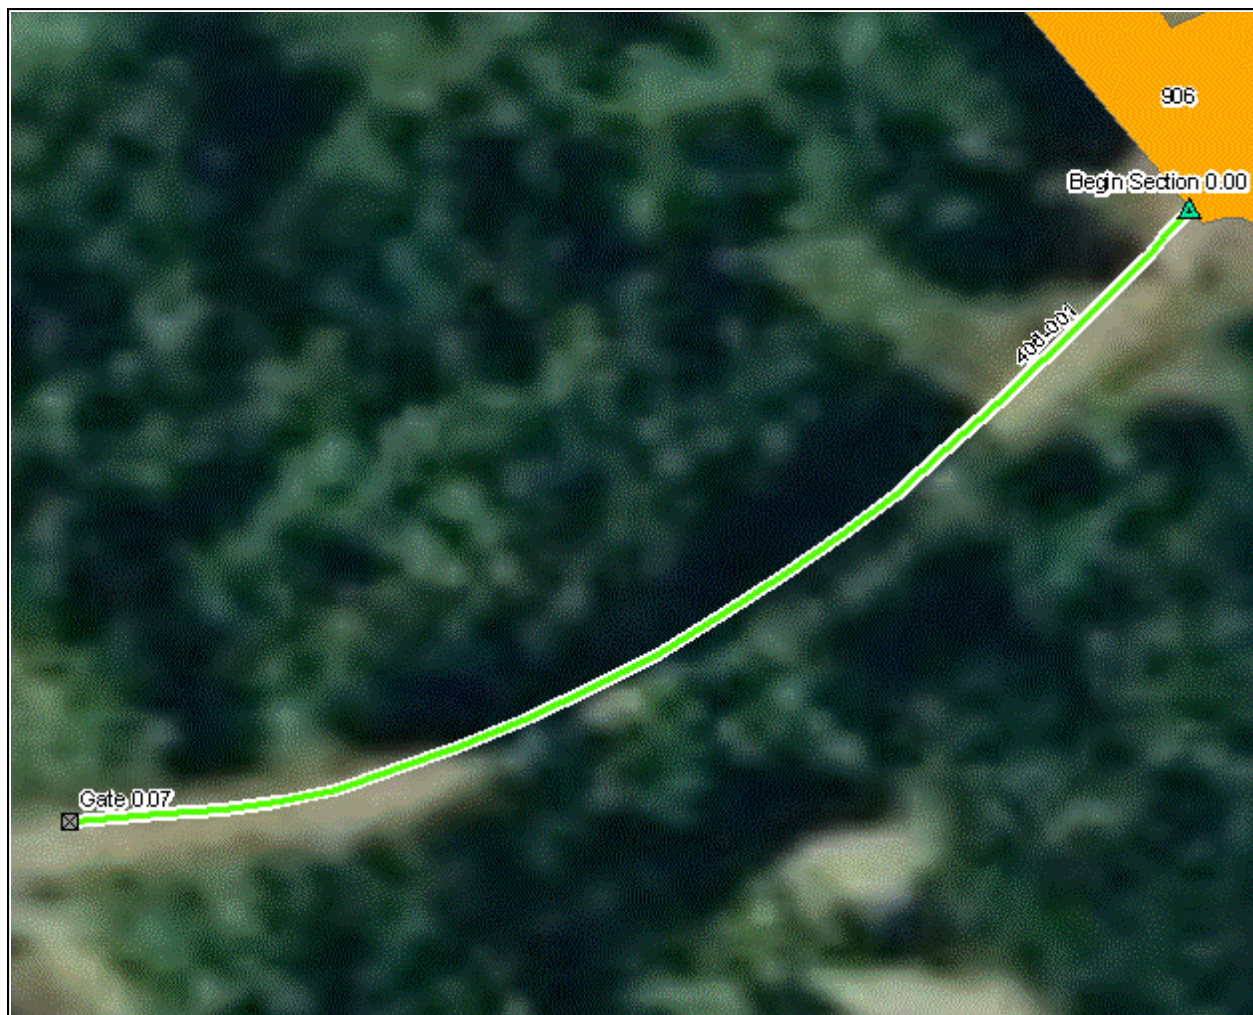


Route: 406 Wilkinson Island Southern Access Road

Total Route Length: **0.07 Miles**

Route Description: From Wilkenson Island Southern Parking (Route 906) to end of route at locked gate

Asset Number	10061162
Section Number	001
Section Length (miles)	0.07
Inspection Date	10/01/2009
Section Information	
Surface Type	Gravel
Number of Lanes	1
Roadway Width (feet)	12.00
Roadway Condition Information	
Condition	Good
Remaining Service Life (years)	7
Cost Estimate	100
CRV	51,800.00



Route: 407 Meissner Island Service Road

Total Route Length: **0.24 Miles**

Route Description: From Meissner Island Parking (Route 907) to end of route at problem area

Asset Number	10061184
Section Number	001
Section Length (miles)	0.24
Inspection Date	10/01/2009
Section Information	
Surface Type	Primitive
Number of Lanes	1
Roadway Width (feet)	10.00
Roadway Condition Information	
Condition	Good
Remaining Service Life (years)	7
Cost Estimate	100
CRV	0.00




Route: 408 Middle Harlow Island Service Road

Total Route Length: **0.02 Miles**

Route Description: From Middle Harlow Island Access Road (Route 100) to end of route at problem area

Asset Number	10061180
Section Number	001
Section Length (miles)	0.02
Inspection Date	10/01/2009
Section Information	
Surface Type	Primitive
Number of Lanes	1
Roadway Width (feet)	8.00
Roadway Condition Information	
Condition	Good
Remaining Service Life (years)	5
Cost Estimate	0
CRV	0.00



Route: 409 Shop Road



Total Route Length: **0.06 Miles**

Route Description: From Rocky Hollow Road to end of distinguishable route

Asset Number	10055415
Section Number	001
Section Length (miles)	0.06
Inspection Date	10/01/2009
Section Information	
Surface Type	Gravel
Number of Lanes	1
Roadway Width (feet)	10.00
Roadway Condition Information	
Condition	Good
Remaining Service Life (years)	7
Cost Estimate	100
CRV	43,900.00


900: South Harlow Island/Truman Boat Ramp Access Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10043506	10/01/2009	Asphalt	873	Good	200

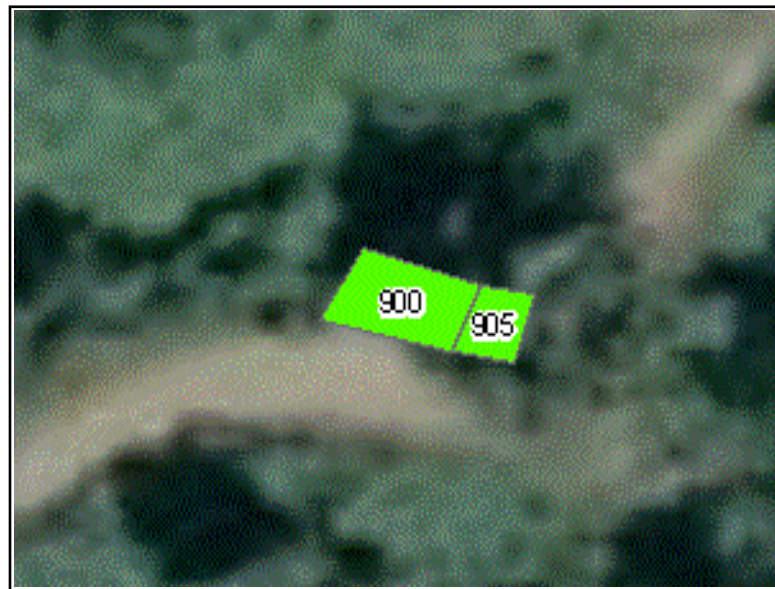

901: Middle Harlow Island Access Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10043507	10/01/2009	Primitive	5,890	Poor	0

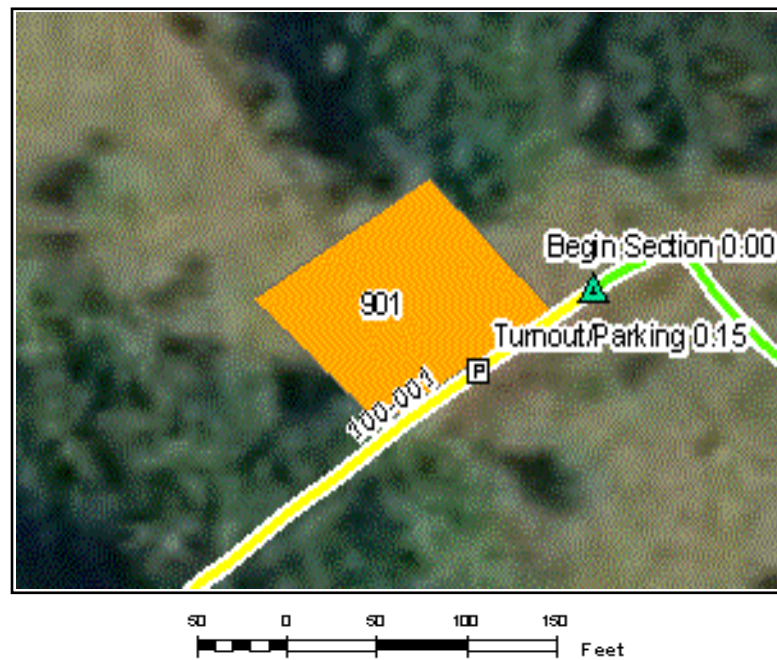


902: North Wilkinson Island Access Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10043501	10/01/2009	Native	8,236	Fair	2,200




904: South Central Wilkinson Island Access Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10043503	10/01/2009	Native	5,235	Fair	1,400




905: South Harlow Island/Truman Boat Ramp Handicapped Access Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10043506	10/01/2009	Asphalt	379	Good	100




906: Southern Wilkinson Island Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10061165	10/01/2009	Primitive	17,113	Poor	0

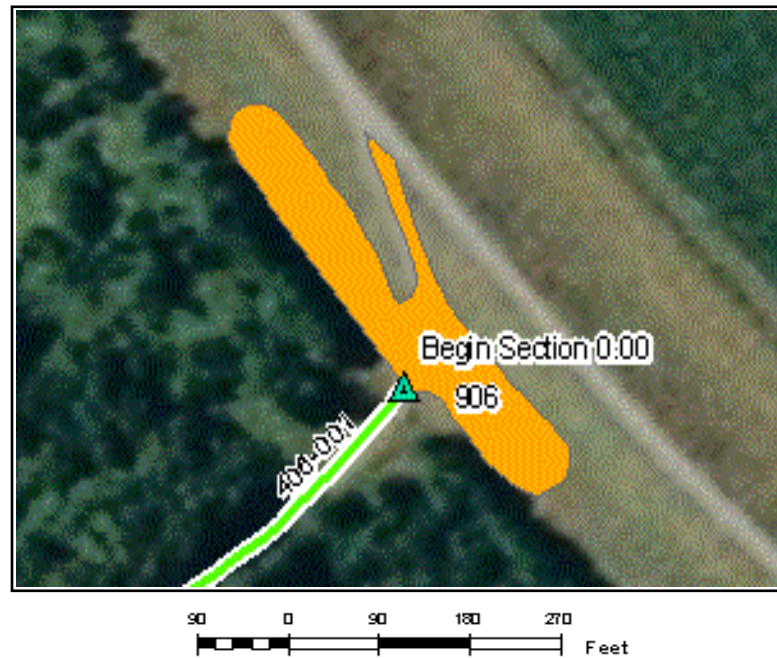


907: Meissner Island Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10061183	10/01/2009	Native	6,341	Fair	1,700



908: Central Wilkinson Island Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10061163	10/01/2009	Gravel	3,235	Fair	900

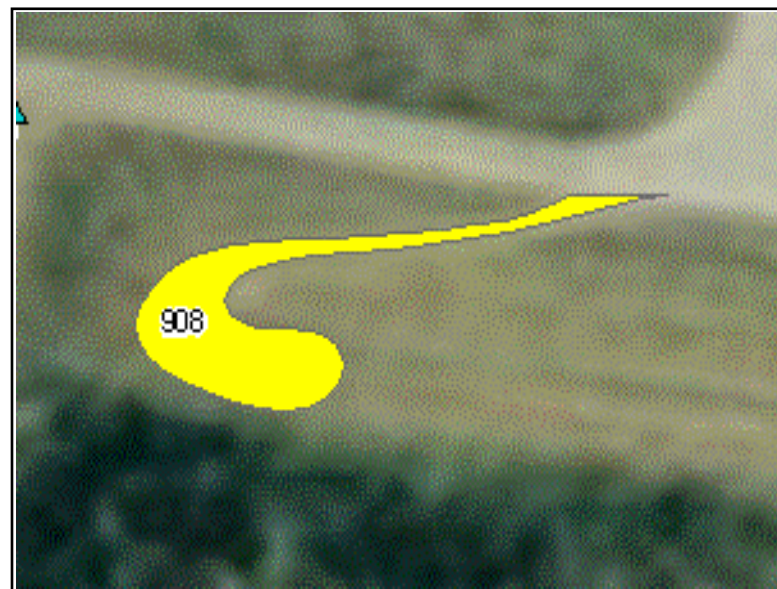


40 0 40 80 120 Feet




909: Shop Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10055415	10/01/2009	Gravel	1,787	Fair	500



910: Headquarters Parking

Asset Number	Date Visited	Surface Type	Area (Sq Ft)	Condition	Cost to Improve
10055417	10/01/2009	Gravel	3,809	Good	600



Middle Mississippi River Bridge Inventory					
Route #	Milepost	NBIS #	Sufficiency Rating	Functionally Obsolete	Structurally Deficient
100	0.11				

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 100 ROUTE NAME: Middle Harlow Island Access Road



Photo # MiMi_C4_0032 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 400 ROUTE NAME: Rockwood Island Service Road



Photo # MiMi_C4_0007 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 401 ROUTE NAME: Wilkinson Island North Road



Photo # MiMi_C4_0010 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 402 ROUTE NAME: Wilkinson Island Dike Road



Photo # MiMi_C4_0012 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 402 ROUTE NAME: Wilkinson Island Dike Road



Photo # MiMi_C4_0013 - MP 0.62 - Problem Area 001

ROUTE NUMBER: 403 ROUTE NAME: Wilkinson Island Center Access Road



Photo # MiMi_C4_0014 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 404 ROUTE NAME: Middle Wilkinson Island Access Connector Road



Photo # MiMi_C4_0016 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 404 ROUTE NAME: Middle Wilkinson Island Access Connector Road



Photo # MiMi_C4_0017 - MP 0.25 - Problem Area 001

ROUTE NUMBER: 405 ROUTE NAME: Middle Wilkinson Island Access Spur Road



Photo # MiMi_C4_0018 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 406 ROUTE NAME: Wilkinson Island Southern Access Road



Photo # MiMi_C4_0021 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 406 ROUTE NAME: Wilkinson Island Southern Access Road



Photo # MiMi_C4_0023 - MP 0.07 - R 001

ROUTE NUMBER: 407 ROUTE NAME: Meissner Island Service Road



Photo # MiMi_C4_0030 - MP 0.00 - Begin Section 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 407 ROUTE NAME: Meissner Island Service Road



Photo # MiMi_C4_0031 - MP 0.24 - Problem Area 001

ROUTE NUMBER: 408 ROUTE NAME: Middle Harlow Island Service Road



Photo # MiMi_C4_0037 - MP 0.00 - Begin Section 001

ROUTE NUMBER: 408 ROUTE NAME: Middle Harlow Island Service Road



Photo # MiMi_C4_0038 - MP 0.02 - Problem Area 001

FEATURES PHOTOGRAPHS

ROUTE NUMBER: 409 ROUTE NAME: Shop Road



Photo # MiMi_C4_0044 - MP 0.00 - Begin Section 001



Photo # MiMi_C4_0048 - Parking Lot 910

Accident Summary

Number of Accidents Reported	Timespan of Accidents	Injuries	Fatalities
0	No Accidents to Report	0	0

APPENDIX

TABLE 1 - GENERAL FWS ROAD FUNCTIONAL CLASSIFICATION	
Class I	Principal Refuge Road (Public Roads) - Routes that constitute the main access route, main auto tour route, or thoroughfare for refuge visitors. These routes are accessible by 2WD vehicles. Routes are numbered from 10 to 99.
Class II	Connector Refuge Road (Public Roads) - Routes that provide circulation within the refuge. These routes can also provide access to areas of scenic, scientific, recreational or cultural interest, such as overlooks, campgrounds, education centers, etc. These routes are accessible by 2WD vehicles. Routes are numbered from 100 to 199.
Class III	Special Purpose Refuge Road (Public Roads) - Roads that provide circulation within special use areas such as campgrounds or public concessionaire facilities or access to remote areas of the refuge. These routes may not be 2WD accessible. Routes are numbered from 200 to 299
Class IV	Administrative Access Road (Administrative Roads) - Routes intended for access to administrative developments or structures such as maintenance offices, employee quarters, or utility areas. These routes are accessible by 2WD vehicles. These routes may restrict access to the general public. Routes are numbered from 300 to 399.
Class V	Restricted Road (Administrative Roads) - Routes normally closed to the public, such as maintenance roads, service roads, patrol roads, and fire breaks. These routes may be open to the public for a short period of time for a special use, such as hunting access. These routes may not be 2WD accessible. Routes are numbered from 400 to 499.

A refuge road system contains those routes within or giving access to a refuge or other unit of the FWS that are administered by the FWS, or by the Service in cooperation with other agencies. The assignment of a functional classification (FC) to a refuge road is not based on traffic volumes or design speed, but on the intended use or function of that route

DESCRIPTION OF RATING SYSTEM

Rating Data is collected on four different surface types: Asphalt, Concrete, Gravel, and Native. The Utah LTAP Center's Remaining Service Life (RSL) system is used for all surface types. The RSL system is based on the Strategic Highway Research Program's (SHRP) Distress Identification Manual.

Asphalt Rating System

Data is collected on the following distresses and conditions:

- **Fatigue Cracking** - Interconnected cracks forming small irregular shapes.
- **Longitudinal Cracking** - Cracks running parallel with the roadway, in the direction of traffic.
- **Transverse Cracking** - Cracks perpendicular to the roadway, going across the lane or lanes.
- **Block Cracking** - Interconnected cracks forming large blocks.
- **Edge Cracking** - Cracks running along the edge of the pavement surface.
- **Patches** - Original surface repaired with new asphalt patch material.
- **Potholes** - Holes or depressions in the pavement.
- **Rutting** - surface depressions in the wheel paths.
- **Roughness** - Evenness of pavement for serviceability.
- **Drainage** - Ability of the road surface to drain water based on proper slope.

A Condition Rating value is calculated for each homogenous pavement section, and can be up to 1 mile in length.

Rating Index Formula

Fatigue, longitudinal, transverse, block, and edge cracking, along with patching and potholes are rated on a 0 - 9 scale (0 = no distress, 9 = maximum distress). The rating given is based on the extent and the severity of the distress. Rutting, roughness, and drainage are rated on a 0 - 3 scale (0 = excellent, 3 = poor). Each distress type has given Remaining Service Life (RSL) values (in years) based on the rating for that particular distress. The distress with the rating resulting in the lowest RSL value is considered to be the governing distress. That value is then assigned as the RSL of the road segment.

Concrete Rating System

Data is collected on the following distresses and conditions:

- **Spalling of Joints** - Chipping, breaking, or cracking of slab edges
- **Joint Seal Damage** - Any damage or condition that enables materials or water to infiltrate into the joint from the surface.
- **Corner Breaks** - A portion of the slab separated by a crack that intersects the adjacent transverse and longitudinal joints, forming approximately a 45° angle to the direction.
- **Broken Slabs** - Faulting and/or cracking localized to individual slabs.

- **Faulting** – Difference in elevation across a crack or joint.
- **Longitudinal Cracking** – Cracks in the pavement running parallel to road.
- **Transverse Cracking** - Cracks in the pavement running perpendicular to the direction of traffic.
- **Patch Deterioration** – Faulting, settling, or cracking of previously placed patch
- **Map Cracking** – A series of cracks that extend only into the upper surface of the Slab

A Condition Rating value is calculated for each homogenous pavement section, and can be up to 1 mile in length.

Rating Index Formula

The rating procedure for concrete pavement is the same as that for asphalt pavement described previously. Each of the distresses described above are rated on the same 0 – 9 scale. The governing distress is then determined and the RSL associated with that distress is assigned to the road segment.

Gravel and Native Rating System

Data is collected on the following distresses and conditions:

- **Cross Section (Crown)** - Roadway built so that the center is higher than the shoulder, to prevent water from pooling on roadway.
- **Roadside Drainage** - Roadside ditches and culverts to handle water flow and prevent pooling on the roadside.
- **Corrugations (Washboarding)** - Small trenches or holes developing perpendicular to the roadway.
- **Potholes** - Holes or depressions in the roadway.
- **Rutting** - Depressions running parallel with the roadway, in the wheelpaths.
- **Dust** - Amount of dust caused by traffic.
- **Loose Aggregate (Gravel Only)** - Loose gravel, typically piled up on the roadway edges or centerline.

A Condition Rating value is calculated for each homogenous pavement section, and can be up to 1 mile in length.

Rating Index Formula

The rating procedure for unpaved roads is the same as that for asphalt and concrete pavements described previously. Of the distresses described above, corrugations, potholes, rutting, and loose aggregate are rated on the same 0 – 9 scale previously mentioned. Cross section, roadside drainage, and dust are rated on the same 0 – 3 scale described for asphalt pavement. The governing distress is then determined and the RSL associated with that distress is assigned to the road segment.

Condition Descriptions by Surface Type

The following definitions are used to describe pavement condition for the various surface types. These are general guidelines for condition indications.

Asphalt

Excellent – Recently constructed or overlaid road where construction or overlay was performed correctly- No maintenance required. RSL = 19-20 years.

Good – Low extent longitudinal and transverse cracks. All cracks are 1/4" or less with little or no crack erosion. Patches are in good condition and applied correctly. Routine Maintenance recommended. RSL = 13-18 years.

Fair - Roads are in good structural condition with little or no fatigue cracking. Longitudinal, transverse, and edge cracking is at medium extent and severity. Block cracking is not extensive. Any patches are in good condition. Preventative maintenance recommended. RSL = 7-12 years.

Poor - Road beginning to show signs of structural distress. Fatigue cracking is medium to high extent and medium severity. Cracking will be severe. Surface may have severe block cracking and show. Patches are in fair to poor condition. There is moderate distortion or rutting and occasional potholes. Rehabilitation recommended. RSL = 1-6 years.

Failed - Road is severely deteriorated. Signs of structural failure appear along with severe and extensive fatigue cracking, distortion, potholes, or extensive patches in poor condition. Reconstruction recommended. RSL = 0 years.

Concrete

Excellent - New pavement. No maintenance required. RSL = 19-20 years

Good - First signs of transverse cracking, patch or repair, more extensive pop-outs, or scaling. Sealing or routine maintenance recommended. RSL = 13-18 years.

Fair – Pavement has joint or crack spalling, and/or faulting, along with cracking at corners with broken pieces. Any Patches are in fair condition and faulting is at a minimum. Preventative maintenance recommended. RSL = 7-12 years.

Poor - Joints and cracks are open 1 inch, spalled, or patched. Faulting is more severe. Rehabilitation recommended. RSL = 1-6 years.

Failed - Most slabs have failed structurally, and faulting is severe. Reconstruction recommended. RSL = 0 years.11-9

The following table shows the relationship between RSL and condition.

SUBJECTIVE CONDITION RATING FOR REMAINING SERVICE LIFE (Asphalt and Concrete Pavements)								
	FAILED	POOR		FAIR		GOOD		EXCELLENT
RSL Years	0	1-3	4-6	7-9	10-12	13-15	16-18	19-20

Gravel and Native

Note - Native surfaces do not have a gravel layer.

Excellent - Newly constructed road that has been constructed properly with proper crown, drainage and gravel layer. Little or no distress. No maintenance recommended. RSL = 8-10 years.

Good - Crown, drainage provisions, and gravel layer are in good condition. Distress limited to traffic effects such as dust, loose aggregate, and low severity corrugations (wash boarding). RSL = 5-7 years.

Fair - Adequate drainage and crown through majority of roadway. Crown repair, ditch improvement may be necessary. Road has more severe corrugations and potholes. Preventative maintenance recommended. RSL = 3-4 years.

Poor - Travel at slow speeds is necessary. Additional gravel layer needed to carry traffic. Poor crown. Ditching is inadequate and rutting is extensive and severe. Rehabilitation recommended. RSL = 1-2 years.

Failed - Travel is difficult, and road may be closed at times. Rutting and Corrugations are very severe. Total Reconstruction of road is recommended. RSL = 0 years.

The following table shows the RSL values for gravel and native roads in terms of excellent, good, fair, poor, and failed condition.

SUBJECTIVE CONDITION RATING FOR REMAINING SERVICE LIFE (Gravel and Native Surfaces)					
	FAILED	POOR	FAIR	GOOD	EXCELLENT
RSL Years	0	1-2	3-4	5-7	8-10

NATIVE PRIMITIVE/IMPROVED RATING SHEET

Cross Section (Crown)*

Severity	Condition		Description
	No Defects	0	Crown 4-6" with no restriction of water flow from centerline to ditch.
	Minor Defects	1	Inadequate or inconsistent crown. Drainage to ditch may be restricted.
	Moderate Defects	2	Flat crown, drainage to ditch restricted.
	Major Defects	3	Reverse crown, bowl-shaped road, drainage on roadway

Rutting

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 6"	1	2	3
	Med 6-12"	4	5	6
	High > 12"	7	8	9

Roadside Drainage*

Severity	Condition		Description
	No Defects	0	Wide, deep ditches (>4') with no restriction to water flow.
	Minor Defects	1	Adequate ditches (>2' deep), minor obstructions restrict water flow.
	Moderate Defects	2	Shallow, narrow and obstructed ditches. Minor erosion of road.
	Major Defects	3	No ditch, drainage on roadway with moderate to severe erosion.

Potholes

Severity	Extent (Area)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 6"	1	2	3
	Med 6-12"	4	5	6
	High > 12"	7	8	9

Dust

Severity	Condition		Description
	No Defects	0	No obstruction to sight distance.
	Minor Defects	1	Sight distance > 550'
	Moderate Defects	2	Sight distance 225'-550'
	Major Defects	3	Sight distance < 225'

Corrugations

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low < 3"	1	2	3
	Med 3-6"	4	5	6
	High > 6"	7	8	9

* Crown and Drainage are not rated for roads that have no constructed crown or drainage. This applies to Native and Gravel roads.

GRAVEL RATING SHEET

Cross Section (Crown)

Severity	Condition		Description
	No Defects	0	Crown 4-6" with no restriction of water flow from centerline to ditch.
	Minor Defects	1	Inadequate or inconsistent crown. Drainage to ditch may be restricted.
	Moderate Defects	2	Flat crown, drainage to ditch restricted.
	Major Defects	3	Reverse crown, bowl-shaped road, drainage on roadway

Rutting

Severity	No Defects	Extent (Length)		
		Low <10%	Med 10-30%	High >30%
	Low < 1"	1	2	3
	Med 1-3"	4	5	6
	High > 3"	7	8	9

Roadside Drainage

Severity	Condition		Description
	No Defects	0	Wide, deep ditches (>4') with no restriction to water flow.
	Minor Defects	1	Adequate ditches (>2' deep), minor obstructions restrict water flow.
	Moderate Defects	2	Shallow, narrow and obstructed ditches. Minor erosion of road.
	Major Defects	3	No ditch, drainage on roadway with moderate to severe erosion.

Potholes

Severity	No Defects	Extent (Area)		
		Low <10%	Med 10-30%	High >30%
	Low < 1"	1	2	3
	Med 1-3"	4	5	6
	High > 3"	7	8	9

Dust

Severity	Condition		Description
	No Defects	0	No obstruction to sight distance.
	Minor Defects	1	Sight distance > 550'
	Moderate Defects	2	Sight distance 225'-550'
	Major Defects	3	Sight distance < 225'

Corrugations

Severity	No Defects	Extent (Length)		
		Low <10%	Med 10-30%	High >30%
	Low < 2"	1	2	3
	Med 2-4"	4	5	6
	High > 4"	7	8	9

* Crown and Drainage are not rated for roads that have no constructed crown or drainage. This applies to Native and Gravel roads.

Loose Aggregate

Severity	No Defects	Extent (Area)		
		Low <10%	Med 10-30%	High >30%
	Low < 1"	1	2	3
	Med 1-3"	4	5	6
	High > 3"	7	8	9

ASPHALT RATING SHEET

Fatigue Cracking

Severity	Extent			
	No Defects	Low 1 crack WP	Med 2 cracks WP	High >30% length
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Edge Cracking

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	0-6" from curb	1	2	3
	6-18" from curb	4	5	6
	> 18" from curb	7	8	9

Longitudinal Cracking

Severity	Extent			
	No Defects	Low 1 crack full length	Med 2 cracks full length	High >2 cracks full length
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Block Cracking

Severity	Extent (Length)			
	No Defects	Low > 15x15' squares	Med 15-10' squares	High <10x10' squares
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Transverse Cracking

Severity	Extent (ft between cracks)			
	No Defects	Low > 200'	Med 200-50'	High < 50'
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Utility Cuts

Severity	Extent (Length)			
	No Defects	Low <10%	Med 10-30%	High >30%
	Low-Cracks < 1/4"	1	2	3
	Med-Cracks 1/4-3/4"	4	5	6
	High-Cracks > 3/4"	7	8	9

Drainage/Roughness/Rutting

Severity	Condition		Description
	No Defects	0	Wide, deep ditches with no obstructions, smooth ride, no rutting, no potholes.
	Minor Defects	1	Drainage may be obstructed, < 1" rutting, minor roughness.
	Moderate Defects	2	Poor drainage, 1-2" rutting, noticeable roughness, potholes < 6" wide.
	Major Defects	3	No drainage; > 2" rutting; potholes 6-12" wide create roughness requiring reduced speeds.

CONCRETE RATING SHEET

Spalling of Joints

Extent (% joints)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low Spalls < 3"	1	2	3
	Med Spalls 3-6"	4	5	6
	High Spalls > 6"	7	8	9

Broken Slabs

Extent (% slabs)				
No Defects	Low <5%	Med 5-15%	High >15%	
Severity	Low-no more than 3 pieces, no spalling/faulting	1	2	3
	Med-broken into >3 pieces, spalling/faulting <1/4"	4	5	6
	High-4 or more pieces, spalling/faulting >1/4"	7	8	9

Transverse Cracks

Extent (% slabs)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low-Cracks < 1/8"; no spalling/faulting	1	2	3
	Med-Cracks 1/8-1/2"; spall <3", fault >1/4"	4	5	6
	High-Cracks > 1/2"; spall >3", fault >1/4"	7	8	9

Joint Seal Damage

Extent (%joints)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low <10% joint length	1	2	3
	Med 10-50% joint length	4	5	6
	High >50% joint length	7	8	9

Faulting

Extent (Length)				
No Defects	Low <10%	Med 10-30%	High >30%	
Severity	Low < 1/2"	1	2	3
	Med 1/2-1"	4	5	6
	High > 1"	7	8	9

Patch Deterioration

Extent (Area)				
No Defects	Low <10%	Med 10-30%	High >30%	
Severity	Low-no fault, no settle at perimeter	1	2	3
	Med-fault & settle <1/4" at perimeter	4	5	6
	High-fault & settle >1/4" at perimeter, cracked patch	7	8	9

Corner Breaks

Extent (% of slabs)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low-corner cracks, no spalling or faulting	1	2	3
	Med-crack slightly spalled & faulted <1/4"	4	5	6
	High-crack highly spalled & faulted >1/4"	7	8	9

Longitudinal Cracks

Extent (% slabs)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low-Cracks < 1/8"; no spalling/faulting	1	2	3
	Med-Cracks 1/8-1/2"; spall <3", fault >1/2"	4	5	6
	High-Cracks > 1/2"; spall >3", fault >1/2"	7	8	9

Map Cracks

Extent (Area)				
No Defects	Low <10%	Med 10-20%	High >20%	
Severity	Low-small connected cracks, no spalling	1	2	3
	Med-connected cracks, no spalling	4	5	6
	High-large connected cracks with surface spalling	7	8	9

Deficiency Ratings With Associated Remaining Service Life

Asphalt Rating Sheet

Fatigue Cracking		Edge Cracking		Transverse Cracking		Utility Cuts	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	20	0	20	0	20	0	20
1	10	1	12	1	14	1	14
2	8	2	10	2	12	2	12
3	6	3	8	3	10	3	10
4	8	4	10	4	12	4	12
5	6	5	8	5	10	5	10
6	4	6	6	6	8	6	8
7	6	7	8	7	10	7	10
8	2	8	6	8	6	8	6
9	0	9	4	9	2	9	2

Longitudinal Cracking		Block Cracking		Drainage/Roughness/Rutting	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	20	0	20	0	20
1	14	1	12	1	16
2	12	2	10	2	10
3	10	3	8	3	4
4	12	4	10		
5	10	5	8		
6	8	6	6		
7	10	7	12		
8	8	8	6		
9	6	9	2		

Concrete Rating Sheet

Spalling		Broken Slabs		Transverse Cracks	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	20	0	20	0	20
1	15	1	15	1	18
2	12	2	12	2	15
3	10	3	10	3	12
4	12	4	12	4	15
5	10	5	10	5	10
6	8	6	8	6	6
7	10	7	10	7	10
8	6	8	6	8	4
9	0	9	0	9	0

Joint Seal Damage		Faulting		Patch Deterioration	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	20	0	20	0	18
1	16	1	15	1	16
2	14	2	12	2	14
3	12	3	10	3	12
4	14	4	12	4	12
5	10	5	8	5	10
6	8	6	6	6	8
7	12	7	10	7	10
8	8	8	4	8	6
9	6	9	0	9	0

Corner Breaks		Longitudinal Cracks		Map Cracks	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	18	0	20	0	20
1	16	1	18	1	18
2	14	2	15	2	15
3	12	3	12	3	12
4	12	4	15	4	12
5	10	5	10	5	10
6	8	6	6	6	6
7	10	7	10	7	10
8	6	8	4	8	4
9	0	9	0	9	0

SUBJECTIVE CONDITION RATING FOR REMAINING SERVICE LIFE IN YEARS (Asphalt & Concrete Roads)

RSL	FAILED 0	POOR 1 - 6	FAIR 7 - 12	GOOD 13 - 18	EXCELLENT 19 - 20
-----	-------------	---------------	----------------	-----------------	----------------------

Deficiency Ratings With Associated Remaining Service Life

Native Primitive Improved Rating Sheet

Cross Section		Rutting		Roadside Drainage	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	10	0	10	0	10
1	7	1	9	1	8
2	5	2	7	2	4
3	0	3	5	3	0
		4	7		
		5	4		
		6	3		
		7	4		
		8	2		
		9	0		

Potholes		Dust		Corrugations	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	10	0	10	0	10
1	9	1	8	1	9
2	7	2	6	2	7
3	5	3	2	3	7
4	7			4	6
5	4			5	5
6	3			6	5
7	4			7	4
8	2			8	3
9	0			9	0

Gravel Rating Sheet

Cross Section		Rutting		Roadside Drainage	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	10	0	10	0	10
1	7	1	9	1	8
2	5	2	7	2	4
3	0	3	5	3	0
		4	7		
		5	4		
		6	3		
		7	4		
		8	2		
		9	0		

Potholes		Dust		Corrugations	
Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life	Distress Rating	Remaining Service Life
0	10	0	10	0	10
1	9	1	8	1	9
2	7	2	6	2	7
3	5	3	2	3	7
4	7			4	6
5	4			5	5
6	3			6	5
7	4			7	4
8	2			8	3
9	0			9	0

Loose Aggregate	
Distress Rating	Remaining Service Life
0	10
1	9
2	8
3	7
4	8
5	7
6	6
7	5
8	3
9	0

SUBJECTIVE CONDITION RATING FOR REMAINING SERVICE LIFE IN YEARS (Gravel & Native Roads)

RSL	FAILED	POOR	FAIR	GOOD	EXCELLENT
	0	1 - 2	3 - 4	5 - 7	8 - 10